
Product Datasheet

DEC-VH-5 **DEC-VH-5S**

Freeze Protected PPE Decontamination Shower

This trace-tape heated and pre-insulated two-stage decontamination shower for outdoor use incorporates a detergent inducing venture feeding an overhead shower and hose brush, plus ten high velocity spray nozzles for the secondary wash-down providing a thorough 360° decontamination. Also available with GRP drain sump. Suitable for use in hazardous areas. Available with galvanised or 316L stainless steel pipework.



Specifications

MATERIALS OF CONSTRUCTION	
PIPEWORK AND FITTINGS	Galvanised mild steel (DEC-VH-5), 316L stainless steel (DEC-VH-5S)
OPERATING VALVES	316L stainless steel
SHOWER SPRAY OUTLET	uPVC shower nozzles and stainless steel and GRP shower rose
PANELLING	Green heavy duty GRP
SERVICES	
WATER INLET	1 ¹ / ₂ " Female BSP
OPERATING PRESSURE	4 to 6 BAR G (57 to 87 PSI)
	(higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW RATES	250 litres/minute minimum (66 US gallons)
ELECTRICAL SUPPLY	230V, single phase, 50/60Hz (110V optional)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	-20° C (-4° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
OPERATIONAL	
SHOWER SPRAY NOZZLES	Hand activated
HOSE BRUSH	Hand activated
WEIGHTS and DIMENSIONS	
DIMENSIONS (WxDxH)	1110mm (43.7in) x 1300mm (51.2in) x 2400mm (94.5in)
WEIGHT (NO OPTIONS)	170kg (375lbs)


View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at www.hughes-safety.com





DEC-VH-5 DEC-VH-5S

Freeze Protected PPE Decontamination Shower

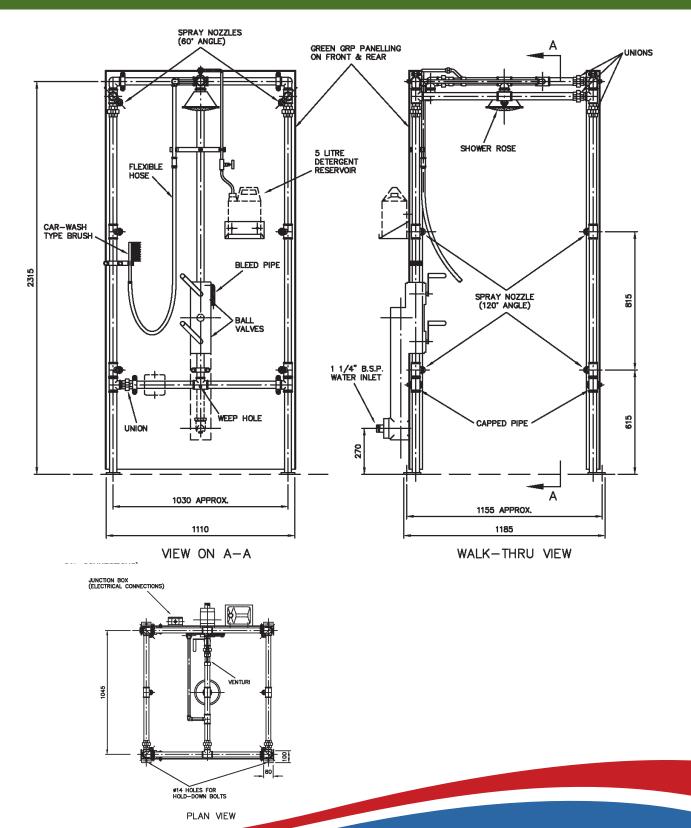



Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK. **Email: info@hughes-safety.com**