

# Product Datasheet

## STD-45G

### Emergency Eye/Face Wash - *Plumbed in*

Wall-mounted emergency eye/face wash with integral lid to protect the bowl and diffusers against dust and debris.

This ANSI compliant, plumbed in eye/face wash is designed to be quick and simple to operate with high flow rate aerated diffusers for improved washing.



## Specifications


MATERIALS OF CONSTRUCTION	
EYE/FACE WASH BOWL/LID	Acrylic Capped ABS
SERVICES	
WATER INLET	1/2" Female BSP
DESIGN OPERATING PRESSURE	2.0 to 6 BAR G (29 to 87 PSI) (higher supply pressures accommodated with the incorporation of the optional pressure reducing valve)
TEST PRESSURE	10.3 BAR G (149 PSI)
MINIMUM FLOW RATES	Eye/Face Wash: 12 litres/minute minimum (3 US Gallons)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
ACTIVATION/OPERATION	
EYE/FACE WASH	Pull lid forward to operate (optional foot treadle control for hands free operation)
WEIGHTS and DIMENSIONS	
DIMENSIONS (WxDxH)	320mm (12.6in) x 362mm (14.3in) x 227mm (8.9in)
WEIGHT	3kg (7lb)

View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at [www.hughes-safety.com](http://www.hughes-safety.com)



**STD-45G**

Emergency Eye/Face Wash - Plumbed in

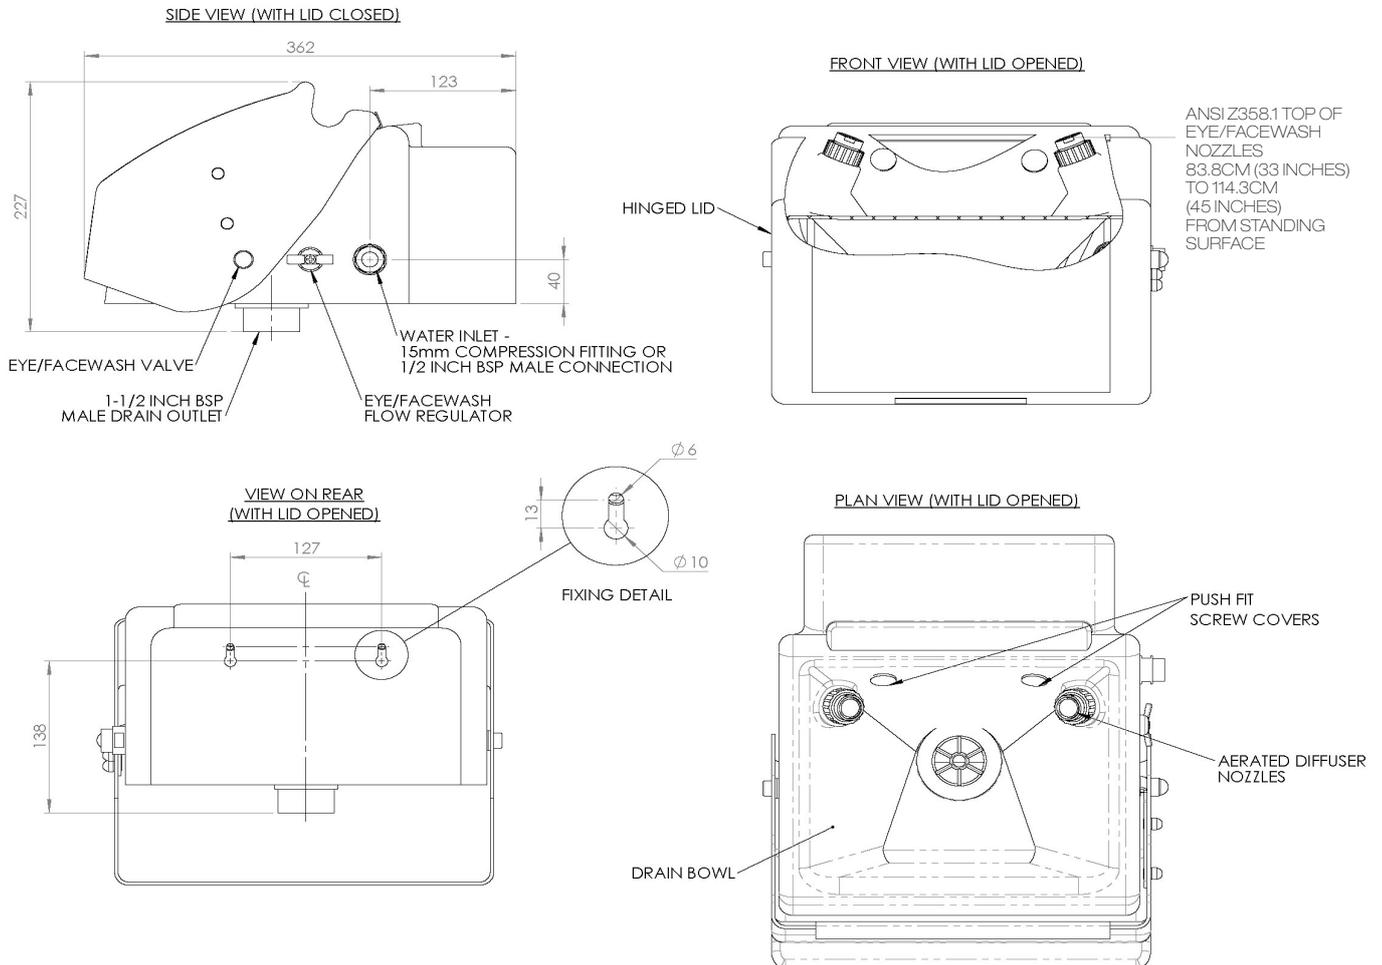

**HUGHES**



**HUGHES-SAFETY.COM**

a Justrite® Group Company

Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK.

Email: [info@hughes-safety.com](mailto:info@hughes-safety.com)

Tel: +44 (0)161 430 6618

Registered No. 0939240. VAT Registration No. 918 5005 32. Hughes Safety Showers Ltd is a Justrite Group Company.