## **Product Datasheet**

## STD-28G Emergency Eye/Face Wash - Self Contained

11 litre portable eye bath unit incorporating a stainless steel cylinder with pressure gauge and a hand-held eye bath diffuser on a flexible hose for ease of use. Available with an optional wall cabinet or heated cabinet.

## Specifications

DODY	
BODY	
MATERIAL	Stainless steel cylinder
CAPACITY	11 litres (2.9 US Gallons)
SERVICES	
OPERATING PRESSURE	6.9 BAR G (100 PSI)
TEST PRESSURE	13.8 BAR G (200 PSI)
BURST PRESSURE	69 BAR G (1000 PSI)
FLOW RATE	6 litres per minute (1.59 gpm)
ENVIRONMENTAL OPERATING TEMPERATURE	
MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
ACTIVATION/OPERATION	
ACTIVATION	Hand operated lever
WEIGHTS and DIMENSIONS	
DIMENSIONS (WxDxH)	180mm (7.1in) x 180mm (7.1in) x 675mm (26.6in)
WEIGHT	15kg (33lbs) full, 4kg (9lbs) empty

View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at www.hughes-safety.com






www.hughes-safety.com

## STD-28G

Emergency Eye/Face Wash - Self Contained

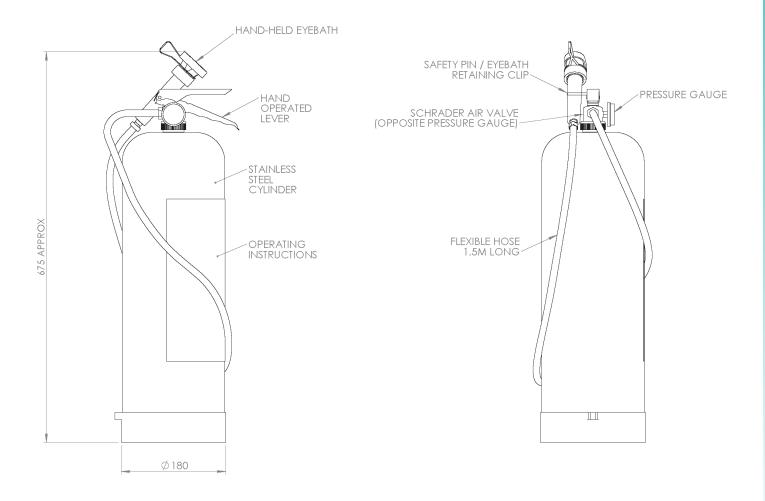



Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK. **Email: info@hughes-safety.com Tel: +44 (0)161 430 6618** 

Registered No. 0939240. VAT Registration No. 918 5005 32. Hughes Safety Showers Ltd is a Justrite Group Company.